

DongGuan City Cled Optoelectronic Co.Ltd

Address:2/F,No.1 Building,National High--tech Industrial Development

Tel:0086-769- 2307 6887 **Fax:**0086-769- 2307 6156 **Email:** sales@bestcled.com

Issued by:BESTCLED

Web: www.bestcled.com


LED Flood light-- 70W

Data sheet

Code	D-02
Item No.	CLED-LTG70-AC/220-G-J-III-C-D02
Input Voltage	AC 170V~265V
Frequency	50/60HZ
Power factor(PF)	$\cong 0.95$
Power efficiency	$> 90\%$
LED power consumption	70W
Whole lamp consumption	76W
LED luminous efficiency	$\cong 100\text{lm/w}$
LED luminous flux	$\cong 6080\text{LM}$
Luminare efficiency (%)	$\cong 90\%$
Color-rendering index (CRI)	$R_a > 70$
Junction temperture (Tj)	$< 80^\circ\text{C}$
IP grade	IP65
Working condition	Temperature: $-30^\circ\text{C} \sim 50^\circ\text{C}$; Humidity: $10\% \sim 90\%\text{RH}$
Storage temperature	$10^\circ\text{C} \sim 60^\circ\text{C}$
Life-span	$> 50,000\text{hours}$
Material	Aluminum alloy
Package size (unit: cm)	44 (L) \times 30(W) \times 33(H)
Net weight	5.8Kg

Product Size

Photo

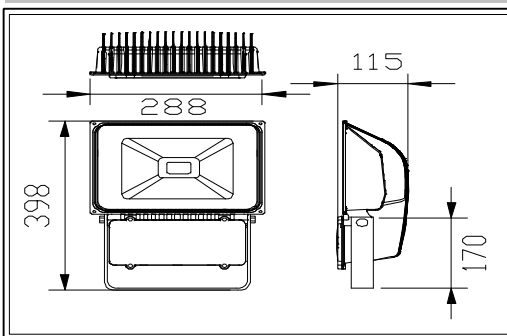

Lighting distribution curve

