






**DongGuan City Cled Optoelectronic Co.Ltd****Address:**2/F,No.1 Building,National High-tech Industrial Development**Tel:**0086-769- 2307 6887 **Fax:**0086-769- 2307 6156 **Email:** sales@bestcled.com**Issued by:**BESTCLED**Web:** www.bestcled.com**LED Street Light--60w**

<b>Parameter</b>	
Code	CLED-LLD60-J-A
Input voltage	CLED-LLD60-AC/220-G-J-III-C-A02
Frequency range	AC 170V~265V
Frequency range	50/60HZ
Power factor (PF)	≥0.95
Power efficiency	>90%
LED power consumption	60W
Console power consumption	66W
LED luminous efficiency	≥100lm/w
LED luminous flux	≥5280LM
Luminare efficiency(%)	≥90%
Color-rendering index(CRI)	Ra>70
Junction temperture(Tj)	<80° C
IP grade	IP65
Working condition	Temperature:-30°C ~50°C ; Humidity:10%~90%RH
Storage temperature	10° C ~60° C
Life-span	>30000Hrs
Material	Aluminum alloy
Package size(unit:cm)	87 (L) × 36 (W) × 24.5 (H)
Net weight	7.8Kg
Stability	Can be used in wide range of voltage and temperature
Low heat	Can be use for long time, reliable
Environment protecting	No Mercury pollution and UV radiation,Ture green light
Chip of light source	U.S. (BRIDGELUX) Puri45*45mil BXCA4545XXX-D
Pole installing diameter	φ 45mm~ φ 60mmm
Certificatons	    

**DongGuan City Cled Optoelectronic Co.Ltd**

**Address:**2/F,No.1 Building,National High-tech Industrial Development

**Tel:**0086-769- 2307 6887 **Fax:**0086-769- 2307 6156 **Email:** sales@bestcled.com

**Issued by:**BESTCLED

**Web:** www.bestcled.com


Heat emission and light distribution

Excellent speeding heat pipe make sure our light have a long life-span  
Features that free-maintenance,solve the problem of luminous  
Make use of our dependent intellectual property right to fulfill your requirement of lighting distribution curve

**Photo**



**Product size**

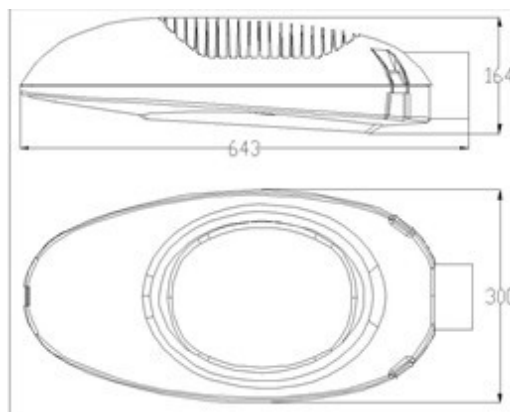

**Lighting distribution curve**

