






**DongGuan City Cled Optoelectronic Co.Ltd****Address:**2/F,No.1 Building,National High--tech Industrial Development**Tel:**0086-769- 2307 6887 **Fax:**0086-769- 2307 6156 **Email:** sales@bestcled.com**Issued by:**BESTCLED**Web:** www.bestcled.com**LED Street Light**

<b>Parameter</b>	
Code	CLED-LLD20-S-0
Input voltage	CLED-LLD20-AC/220-G-S-III-C-002
Frequency range	AC 170V~265V
Frequency range	50/60HZ
Power factor (PF)	≥0.95
Power efficiency	>90%
LED power consumption	20W
Console power consumption	23W
LED luminous efficiency	≥100lm/w
LED luminous flux	≥1800LM
Iuminare efficiency(%)	≥90%
Color-rendering index(CRI)	Ra>70
Junction temperture(Tj)	<80° C
IP grade	IP65
Working condition	Temperature:-30°C ~50°C ; Humidity:10%~90%RH
Storage temperature	10° C ~60° C
Life-span	>30000Hrs
Material	Aluminum alloy
Package size(unit:cm)	57.5 (L) × 27.5 (W) × 37.5 (H)
Net weight	4.2Kg
Stability	Can be used in wide range of voltage and temperature
Low heat	Can be use for long time, reliable
Environment protecting	No Mercury pollution and UV radiation,Ture green light
Chip of light source	U.S. (BRIDGELUX) Puri45*45mil BXCA4545XXX-D
Pole installing diameter	φ 45mm
Certificatons	    
Heat emissionand light distribution	Excellent speeding heat pipe make sure our light have a long life-span Features that free-maintennance,solve the problem of luminous Make use of our dependent intellectual property right to fulfill your requirement of lighting distribution curve

**DongGuan City Cled Optoelectronic Co.Ltd**


**Address:**2/F,No.1 Building,National High--tech Industrial Development

**Tel:**0086-769- 2307 6887 **Fax:**0086-769- 2307 6156 **Email:** sales@bestcled.com


**Issued by:**BESTCLED

**Web:** www.bestcled.com

**Photo**

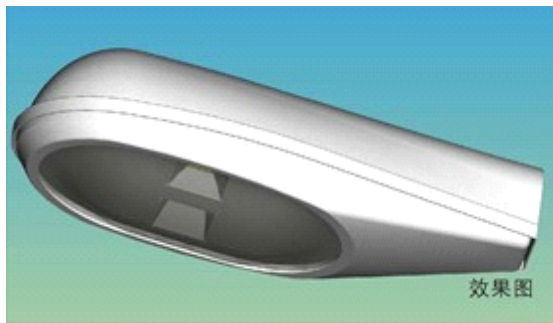

**Product size**

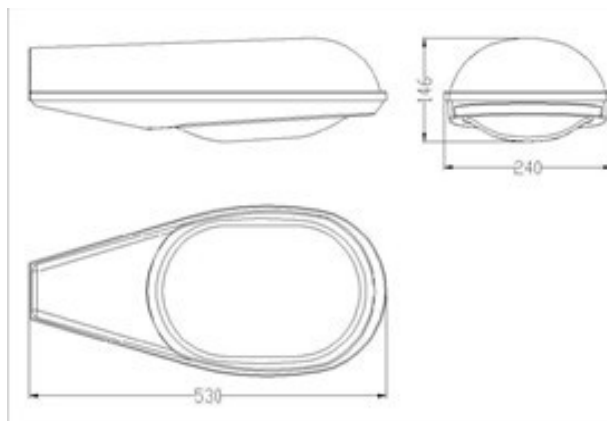

**Lighting distribution curve**

