






DongGuan City Cled Optoelectronic Co.Ltd**Address** 2/F, No.1 Building, National High-tech Industrial Development**Tel:** 0086-769- 2307 6887 **Fax:** 0086-769- 2307 6156 **Email:** sales@bestcled.com**Issued by:** BESTCLED**Web:** www.bestcled.com**Solar LED Street Light**

Parameter	
Code	CLED-LLD72-S-K-T
Input voltage	CLED-LLD72-DC/24-G-S-III-C-K02
Frequency range	DC 24V
Power efficiency	>90%
LED power consumption	72W
Console power consumption	80W
LED luminous efficiency	≥ 100 lm/w
LED luminous flux	≥ 6400 LM
Luminare efficiency (%)	≥ 90 %
Color-rendering index (CRI)	Ra>70
Junction temperture (Tj)	<80° C
IP grade	IP65
Working condition	Temperature:-30°C ~50°C ; Humidity:10%~90%RH
Storage temperature	10° C ~60° C
Life-span	>30000Hrs
Material	Aluminum alloy
Package size(unit:cm)	77 (L) × 39 (W) × 22 (H)
Net weight	9. 8Kg
Stability	Can be used in wide range of voltage and temperature
Low heat	Can be use for long time, reliable
Environment protecting	No Mercury pollution and UV radiation, Ture green light
Chip of light source	U.S. (BRIDGELUX) Puri45*45mil BXCA4545XXX-D
Pole installing diameter	$\phi 45$ mm ~ $\phi 65$ mm
Certificatons	    

DongGuan City Cled Optoelectronic Co.Ltd

Address 2/F, No.1 Building, National High-tech Industrial Development

Tel: 0086-769- 2307 6887 **Fax:** 0086-769- 2307 6156 **Email:** sales@bestcled.com

Issued by: BESTCLED

Web: www.bestcled.com


Heat emission and light distribution

Excellent speeding heat pipe make sure our light have a long life-span

Features that free-maintenance, solve the problem of luminous


Make use of our dependent intellectual property right to fulfill your requirement of lighting distribution curve

Photo

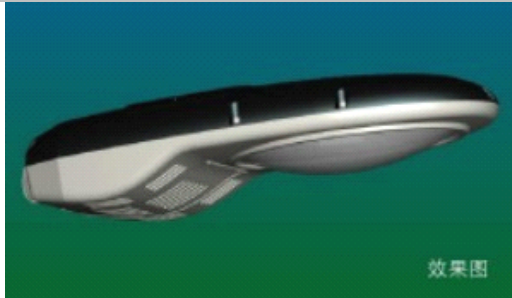

Product size

尺寸图

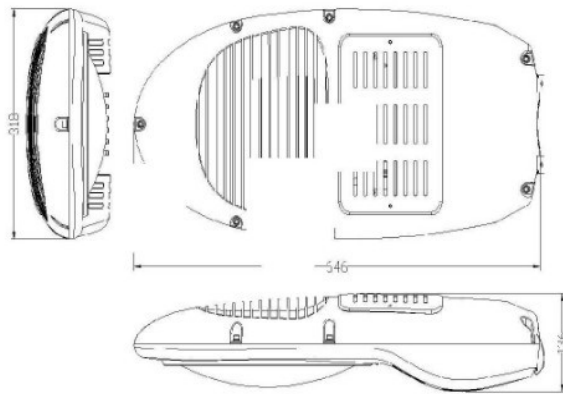

Lighting distribution curve

