
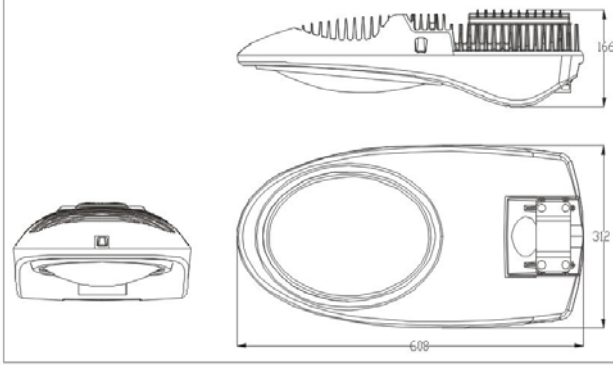
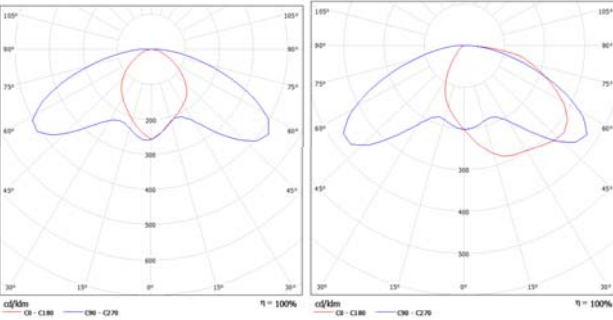



SPECIFICATION OF CLED-LLD72-DC/24-G-J-II-C-B02		
<b>Code No.</b>	CLED-LLD72-DC/24-G-J-II-C-B02	  
<b>LED Power Consumption:</b>	72 W	
<b>Total Power Consumption:</b>	80 W	
<b>Input Voltage:</b>	12V/24V	
<b>Working Voltage:</b>	32V	
<b>Working Current:</b>	350mA	
<b>Power Efficiency:</b>	>90%	
<b>LED Luminous Efficiency:</b>	≥100lm/W	
<b>LED Luminous Flux:</b>	8800 lm	
<b>Luminaire Initial Lumen Output:</b>	6802 lm	
<b>Luminaire Efficiency:</b>	≥90%	
<b>CRI (Color Rendering Index) :</b>	>70Ra	
<b>CCT(Correlated Color Temperature):</b>	3500K~6000K	
<b>Junction Temp&gt;(Tj):</b>	<80℃	
<b>IP (Ingress Protection) :</b>	IP65	
<b>System resistance:</b>	<0.1Ω	
<b>Working Condition:</b>	Temp.: -30℃~50℃ Humidity: 10%~90%	
<b>Storage Temp.:</b>	-35℃~60℃	
<b>Beam Angle:</b>	130°(H) x 80°(V)	
<b>LED Chips:</b>	BRIDGELUX 45mil/50mil/60mil	
<b>LED Driver:</b>	Meanwell	
<b>Housing:</b>	Aluminum Alloy	
<b>Reflector:</b>	High Pure and Reflective Efficiency Aluminum Alloy	
<b>Cover:</b>	Tempered Glass	
<b>Pipe Mounting Dismeter:</b>	1.77-2.56 in. pipe(45mm-65mm)	
<b>Dimension(mm):</b>	608x312x166 (mm)	
<b>Packing Size(mm):</b>	810x400x260 (mm)	
<b>Weight(kg):</b>	13.7(kg)	
<b>QTY FOR 20' GP</b>	280 (pcs)	<b>ADVANTAGE</b>
<b>QTY FOR 40' GP</b>	576 (pcs)	<b>Warranty:</b>
<b>QTY FOR 40' HP</b>	720 (pcs)	5 years
		<b>Energy Saving:</b>
		Up to 60% compared to traditional HPS Lighting and MH
		<b>Long life:</b>
		LED Lamps last for more than 50,000 hrs (12 hrs/day for about 10 years)
		<b>Heat Dissipation:</b>
		Patented heat dissipation design, achieve optimum efficiency and long life-span
		<b>Dimming Control:</b>
		Wireless Intelligent Control System, Timmer, for secondary energy saving
		<b>Solid-State:</b>
		High-Shock, High-Vibration and Salt Spray Resistant
	<b>Protective:</b>	
	Surge, High and Reverse Voltage Protective	
	<b>Instant-On:</b>	
	Turn on right away, without delay in Re-Switch on	
	<b>Environment Friendly:</b>	
	Without Harmful Materials of Lead and Mercury Halogen	
	<b>Selfcleaning</b>	
	Special patent design with selfcleaning function to ensure good heat dissipation and long life-span	
	<b>Low Maintenance Cost:</b>	
	Long life-span and selfcleaning function to ensure None or Low maintenance cost	
	<b>Application</b>	
	Local Road, Rural Road, Residential Road and Parking Lot	